

HITACHI

# airH<sub>2</sub>O 400

air to Water Heat Pump



Cooling & Heating







# INDEX

04 **airH<sub>2</sub>O** 400 air to Water Heat Pump

05 Product Lineup Overview

06 Regulations and Certifications

07 Features & Benefits

18 Accessories & Engineering Tools



20 Technical Data

# airH<sub>2</sub>O 400

## air to Water Heat Pump

The heat pump system is a device that transforms energy from the air, the soil and the water to useful heat. Compared with the conventional electrical heater and fossil fuel heater, the system is more energy-efficient, eco-friendly.

Thanks to the heat pump technology, the air to water heat pump system can be driven by a small amount of electric energy, extract renewable heat from the outside air, and then supply a large amount of heat to your home. The heat output is greater than the electricity input, thus the system is extremely high efficiency.

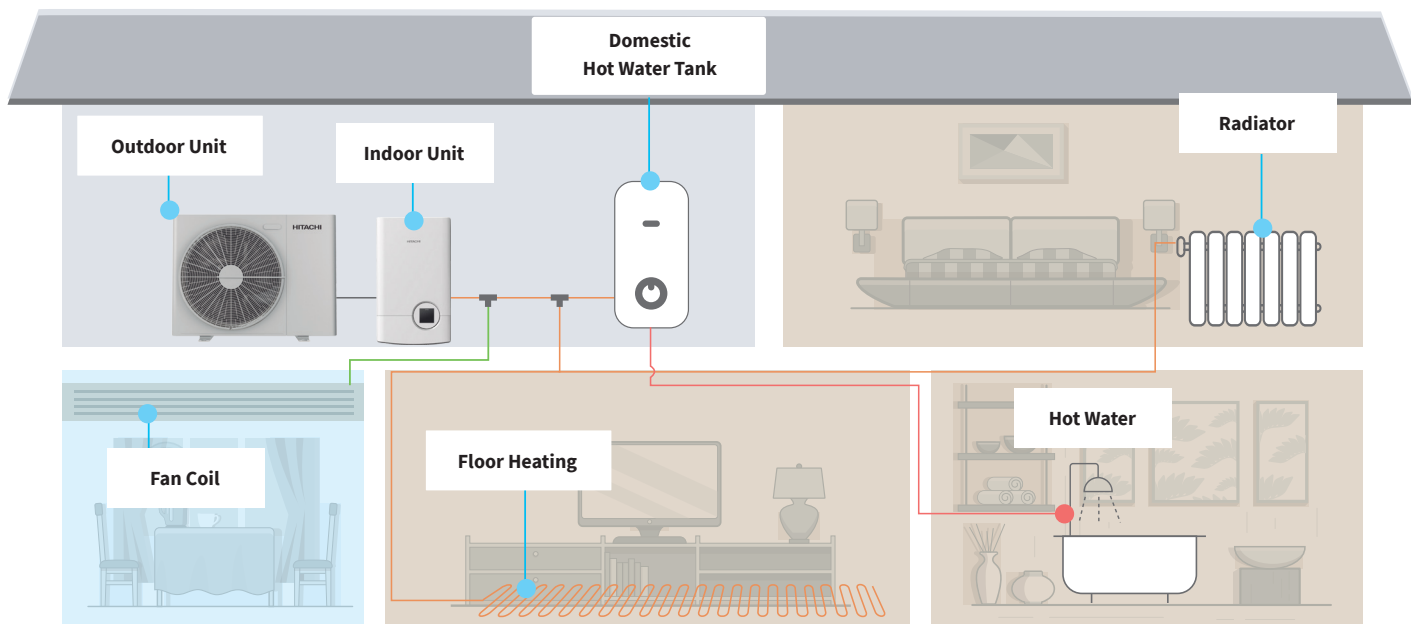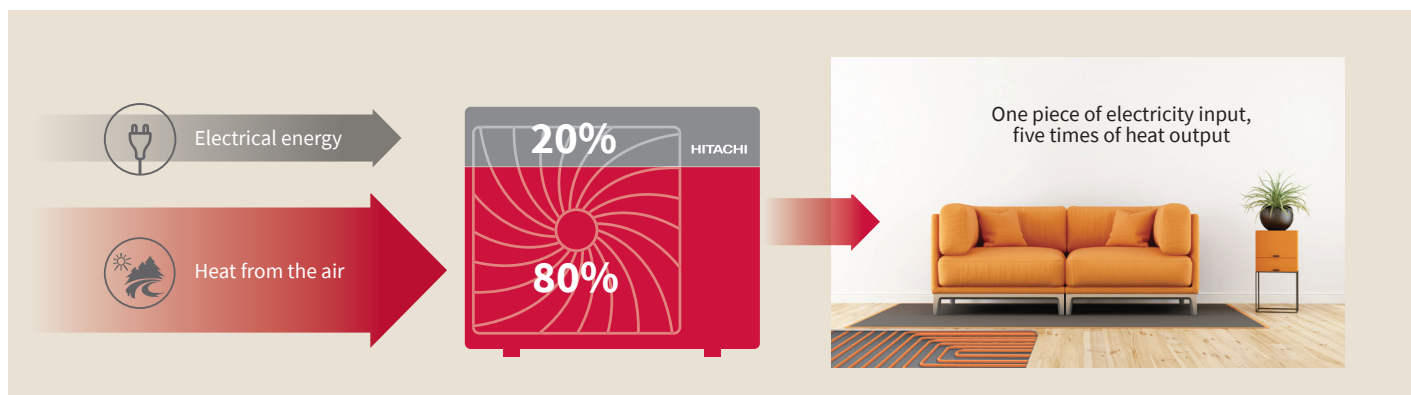



Product Lineup Overview

| Type                            | Split                                                                                                                                                                                                                                                                                                                                                                                  | Monobloc                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Series                          | airH <sub>2</sub> O <sub>400</sub> split                                                                                                                                                                                                                                                                                                                                               | airH <sub>2</sub> O <sub>400</sub> Mono                                                                                                                                                                                                                                                                                                                                                                                                          |
| Diagram                         |                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Refrigerant Type                | R32                                                                                                                                                                                                                                                                                                                                                                                    | R32                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Capacities                      | 4.4/6.0/8.0/10.0/12.0/14.0/16.0kW                                                                                                                                                                                                                                                                                                                                                      | 4.4/8.0kW                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Application                     |                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Energy Label Space Heating 35°C | A+++                                                                                                                                                                                                                                                                                                                                                                                   | A+++                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Energy Label Space Heating 55°C | A++                                                                                                                                                                                                                                                                                                                                                                                    | A++                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Benefit                         | <ul style="list-style-type: none"><li>• A+++ energy efficiency</li><li>• Stable heating under -25°C</li><li>• 60°C leaving water</li><li>• Two separate temp. cycles</li><li>• Visual display of energy consumption</li><li>• Centralized control for different water cycles and individual control for rooms</li><li>• Suitable for different complex application scenarios</li></ul> | <ul style="list-style-type: none"><li>• A+++ energy efficiency</li><li>• Stable heating under -25°C</li><li>• 60°C leaving water</li><li>• Two separate temp. cycles</li><li>• Visual display of energy consumption</li><li>• Centralized control for different water cycles and individual control for rooms</li><li>• Suitable for different complex application scenarios</li><li>• Easy installation without refrigerant operation</li></ul> |


## Regulations and Certifications

### F-Gas Regulation

European regulation F-GAS (517/2014) came into force on 1st January 2015, in order to reduce greenhouse gas emissions. It aims to reduce the environmental impact of F-gases through the reduction of the amount of HFC (hydrofluorocarbon) refrigerant used in cooling and heating systems.

The regulation 517/2014 prescribes a phase-down of HFCs, where the quantities of HFCs that are placed on the market are gradually reduced through the allocation of quotas by the European Commission. The phase-down targets are expressed in CO<sub>2</sub> equivalents (= kg x GWP- Global Warming Potential) and aim to reduce HFC consumption by 79% in 2030.

### Consumption of HFC compared to CO<sub>2</sub> equivalent tonnes

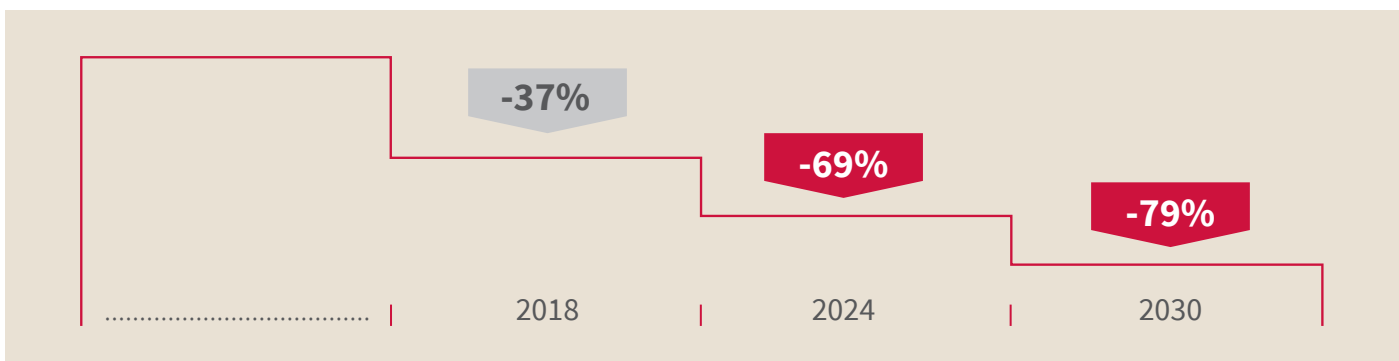



# Features & Benefits


## High Efficiency and Excellent Performance

### Eco-friendly Refrigerant R32

R32 refrigerant contributes to meeting the F-gas regulation targets as described in EU regulation 517/2014. Hitachi airH2O 400 heat pump system adopts R32 refrigerant, which is a perfect solution for attaining the new European CO2 emission targets.



#### Features

- ◆ Zero Ozone Depletion Potential (ODP)
- ◆ Lower Global Warming Potential (GWP)
- ◆ Less charge amount under the same capacity
- ◆ Single component refrigerant, easy to handle and recycle

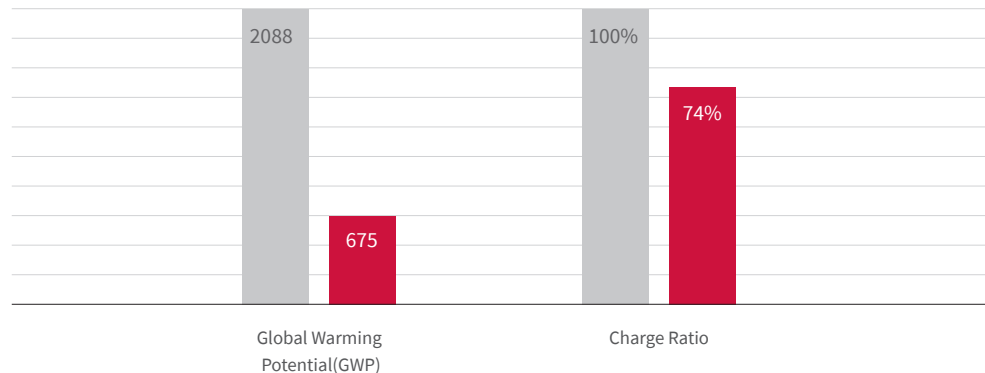

### High Efficiency A+++

airH2O 400 offers the best and efficient solution for home heating and hot water supply. It has the top class A+++ energy classification under the low-temperature water condition, and A++ under the mid-temperature water condition, which ensures you make savings on your energy bills, reducing electricity consumption and the impact on the environment.

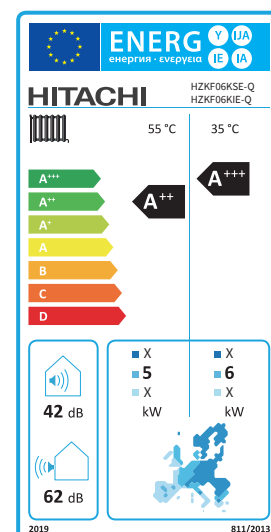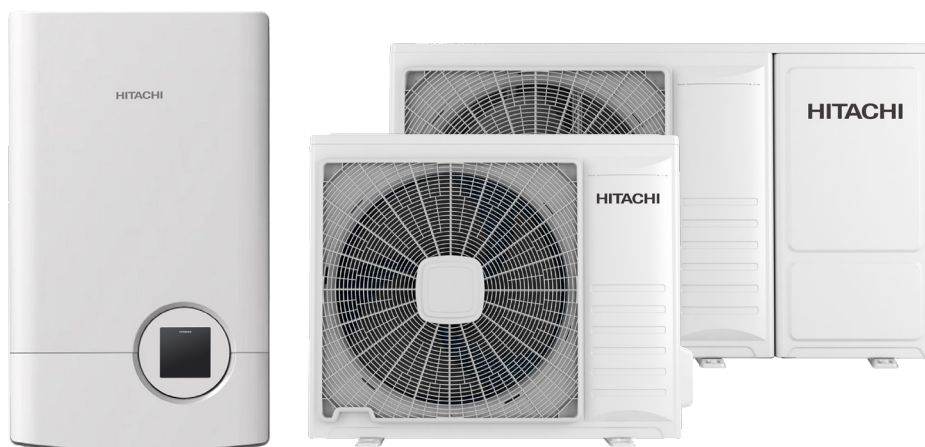


\*Take HZKF06KSE-Q, HZKF06KIE-Q as an example.

## High-efficiency DC Inverter Compressor

A high-efficiency DC inverter twin rotary compressor is adopted. It features unique dual-pressure chamber design and symmetrical location, which can effectively reduce the vibration and noise and improve the compressor performance, especially the performance under low-frequency operation.


Moreover, the twin rotary compressor has a small lubricating oil injection volume with stable oil return, and comes with a gas-liquid separator, which makes the system more reliable.

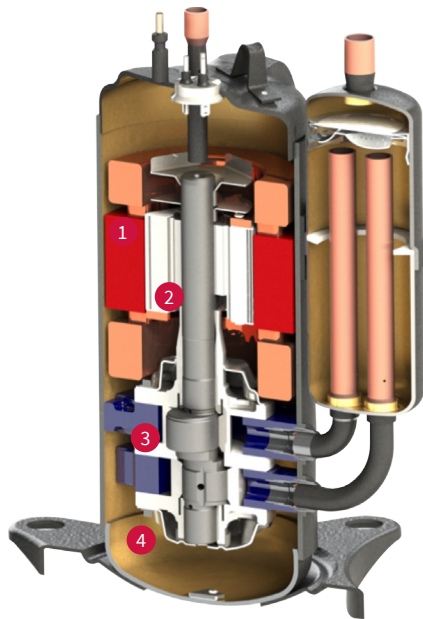

- 1 High-efficiency motor**  
Optimize the motor design to improve compressor performance.
- 2 Optimized rotor design**  
Lower the center of gravity of the compressor to reduce the noise and vibration.
- 3 Flat mechanism design**  
Improve the volumetric efficiency and the total performance.
- 4 Screw interactive fastening**  
Improve fastening effect and reduce deformation of the core.

## Wide Operation Range


Stable operation is guaranteed, even with outdoor temperatures as low as  $-25^{\circ}\text{C}$ , effectively satisfying the heating demand in extremely cold areas. It can generate up to  $60^{\circ}\text{C}$  leaving water from the indoor unit. Besides, the operation range of DHW is extended to  $40^{\circ}\text{C}$ , and the water inside the water tank can achieve max.  $75^{\circ}\text{C}$  with electric heater, enabling effective sterilization.

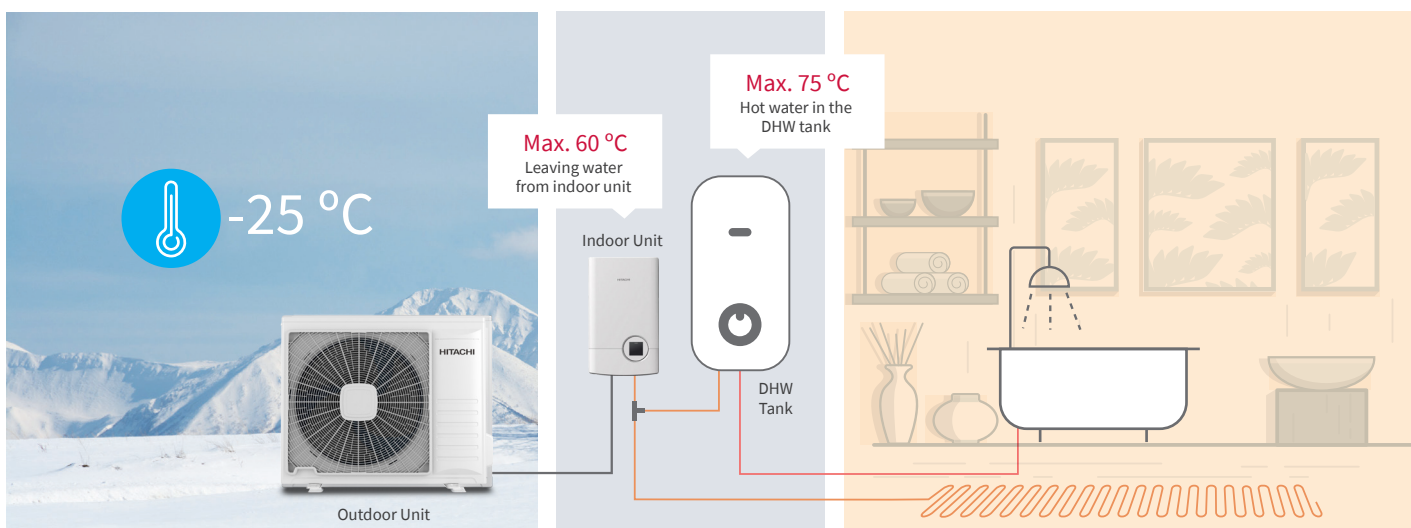



### Interlock with 3rd Party Heat Source


airH2O 400 system can interlock with the 3rd party heat source, like the solar thermal or the boiler which can work as an auxiliary heat source. Thanks to the interlock design, both the user experience and energy efficiency can be optimized.

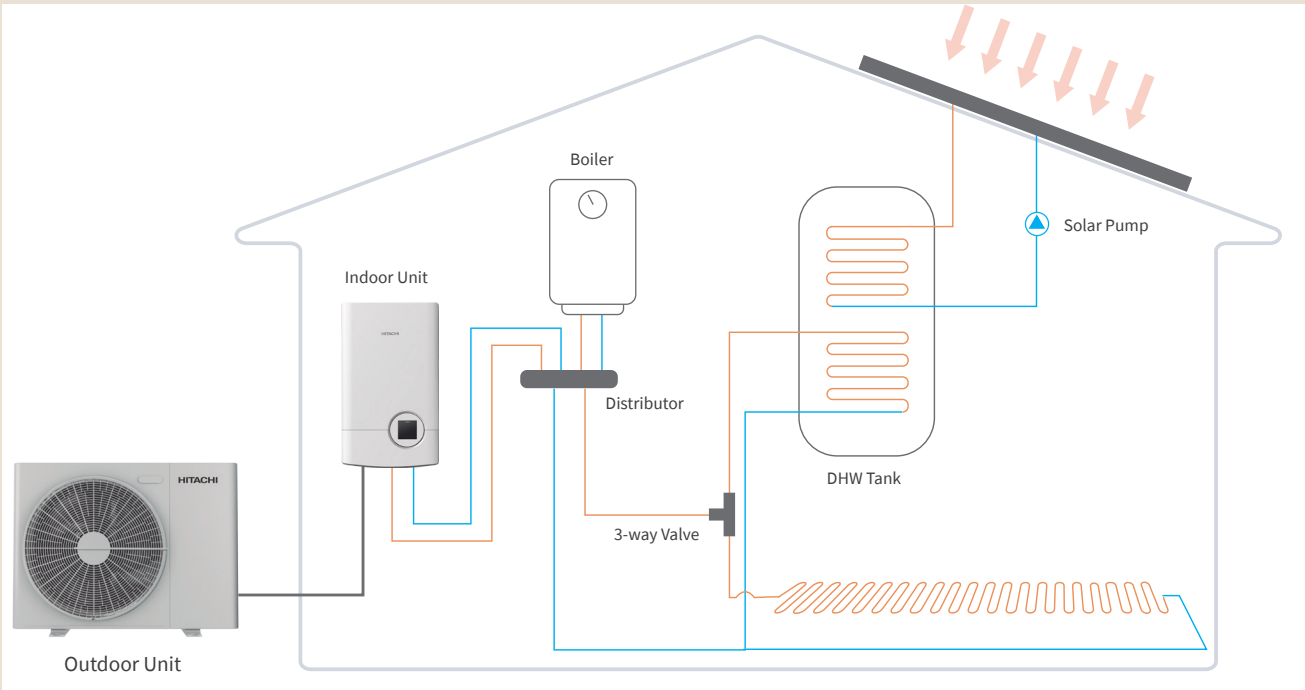

### Smart Grid Interlock and PV Enabled

airH2O 400 system can be integrated into the smart grid, to achieve a low-cost operation required to meet carbon reduction targets. Also, the system can be integrated to the Photovoltaic(PV), saving energy through renewable sources.

The system's potential can be maximised by connecting to Smart Grid or Photovoltaic(PV).


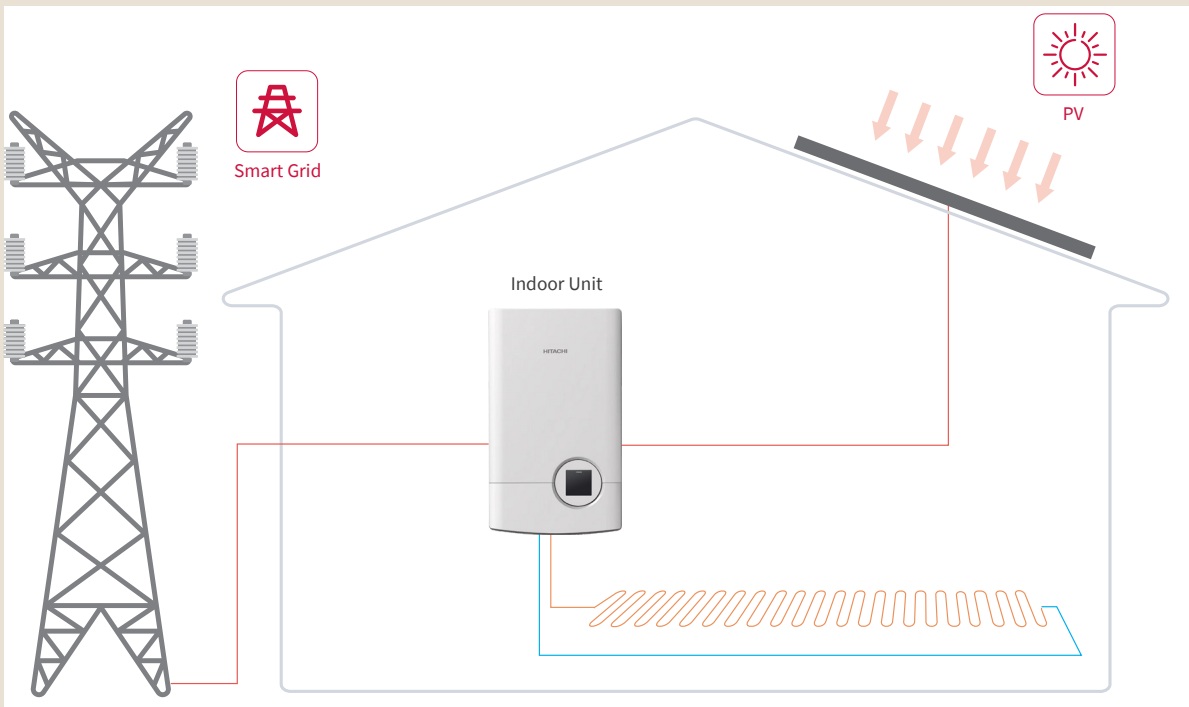


# Features & Benefits

## User Convenience

### Two Separate Temperature Cycles

Two temperature zones through the separate heating cycles is possible with the mixing valve kit, enabling different water temperatures for underfloor heating and the radiator.

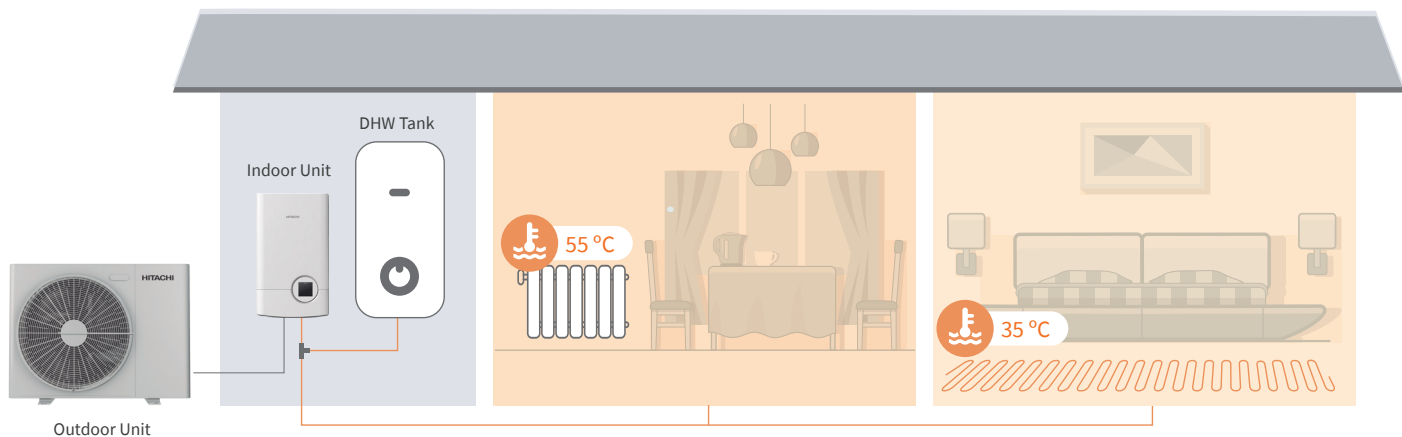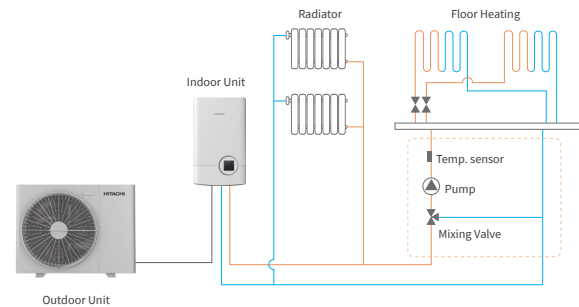

### Low Noise Operation

#### Low Noise Mode

The air to water heat pump system can work in low-noise operation mode for optimal user comfort, which can be achieved just by one touch in the controller or through the setting of input/output. Max.8 dB(A) can be reduced during this mode.

#### Night Shift Mode

Under the night shift mode, the operation period can be set according to users' demand freely. The sound pressure level can be reduced to 35dB(A)\*. All these settings can be achieved in the controller or through the setting of input/output.


\*Take the unit airH2O 400 HZKF04KSE-Q as an example.





## Up to 7 Rooms with Independent Temperature Control

In one airH2O 400 system, the temperature of up to 7 rooms can be independently controlled, through installing temperature sensors or room thermostats in the rooms, satisfying the diverse needs of customers.


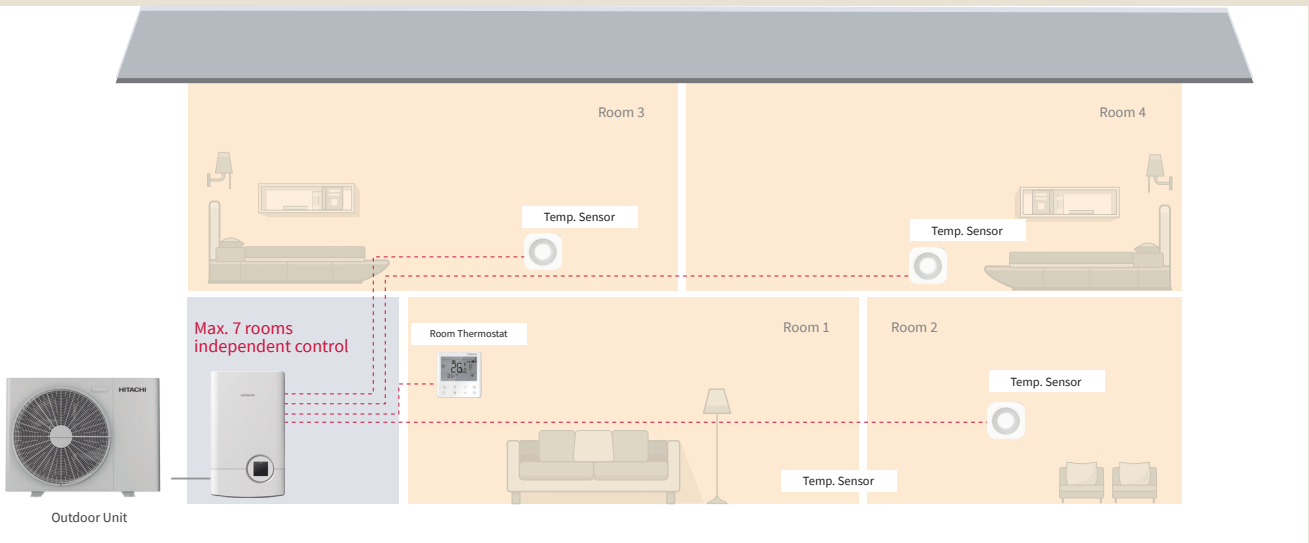


Note: In one airH2O 400 system, up to 2 room thermostats and max. 6 wall mounted temp. sensors can be connected.

## Screed Drying Function


airH2O 400 air to water heat pump unit has an automatic program for drying out the screed during the construction of a house with the floor heating underfloor.

The screed drying process lasts for 7 days. In the first three days, the system operates with the outlet water temperature of 25 °C, and in the next four days, the system operates with the presetting maximum outlet water temperature.

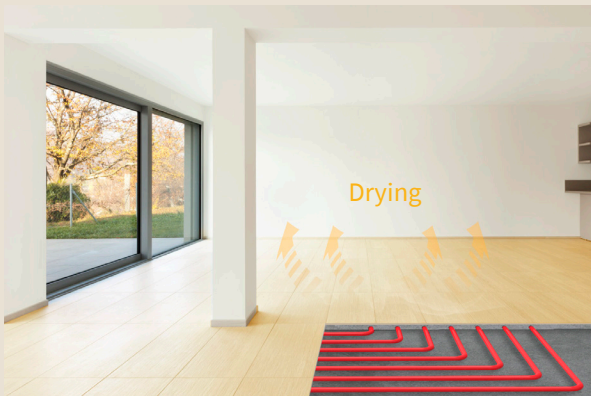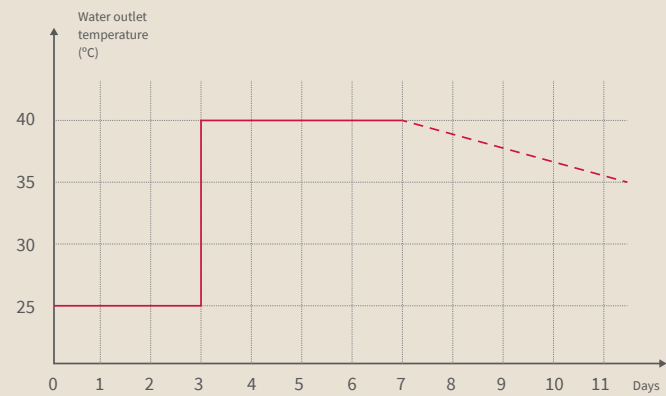

## Swimming Pool Heating

airH2O 400 heat pump system can also achieve heating swimming pools. When the swimming pool operation is activated, the hot water will go into the swimming pool heat exchanger, allowing to heat the swimming pool water temperature to a comfortable water temperature between 24 and 33 °C.

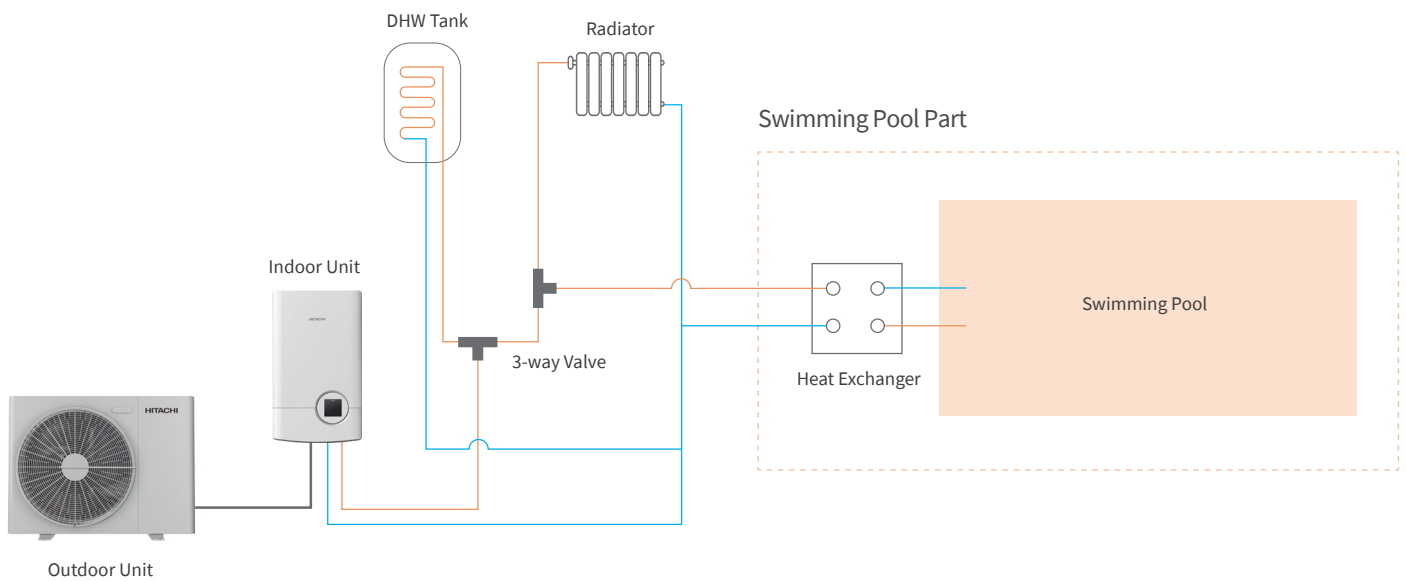




## Features & Benefits

### High Intelligence

#### Colorful Touch Controller HAQ-CTR-01\*

Access and customize your device's important settings with ease through the colorful touch controller, enabling precise temperature and mode adjustments with just a few taps.

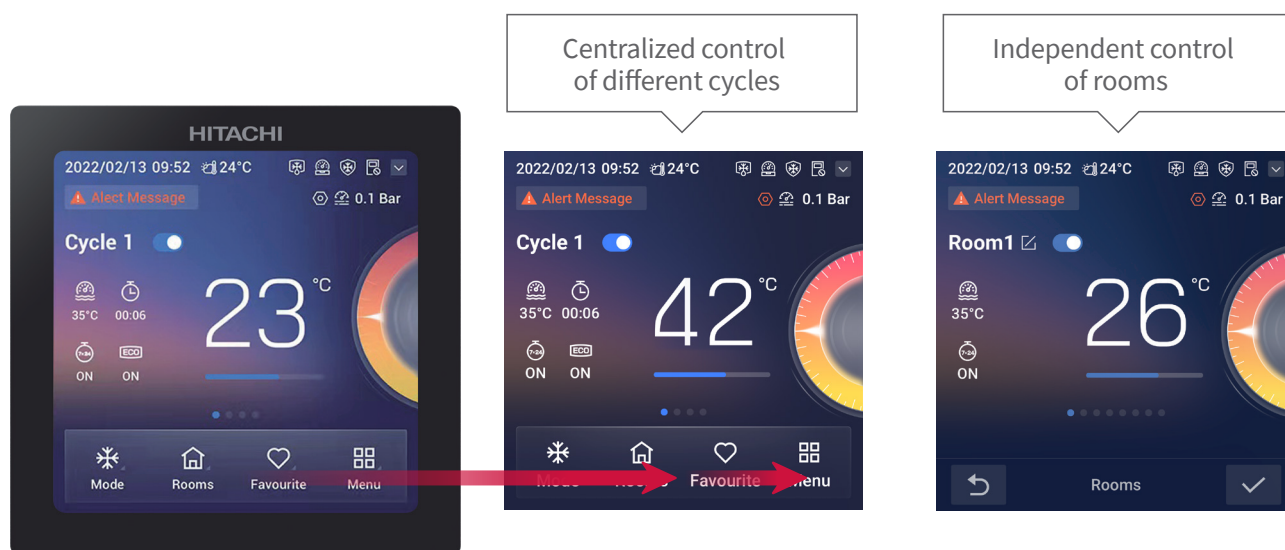


#### Sliding Interface

Quick switching between different interfaces can be easily achieved by sliding the screen left and right.

- Sleek and elegant design
- Compact, measures only 90×90mm
- Intuitive touch-screen control

### Predefined Configuration


Configure your device with ease using the new “Predefined configuration” feature that allows for quick setup in just 3 simple steps, with the ability to preset up to 6 scenarios for ultimate convenience and simplicity.

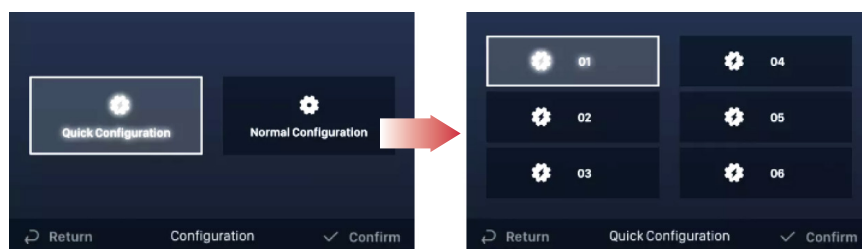

\*Note: It can be demounted and used as a room thermostat, please consult the details with local technician or refer to TC.

## Room Thermostat HAQ-RTU-01

It can not only set the rooms' temperature, but also accurately link with indoor unit, to feedback the room's load change in real time, ensuring comfortable indoor temperature and high-efficiency operation.

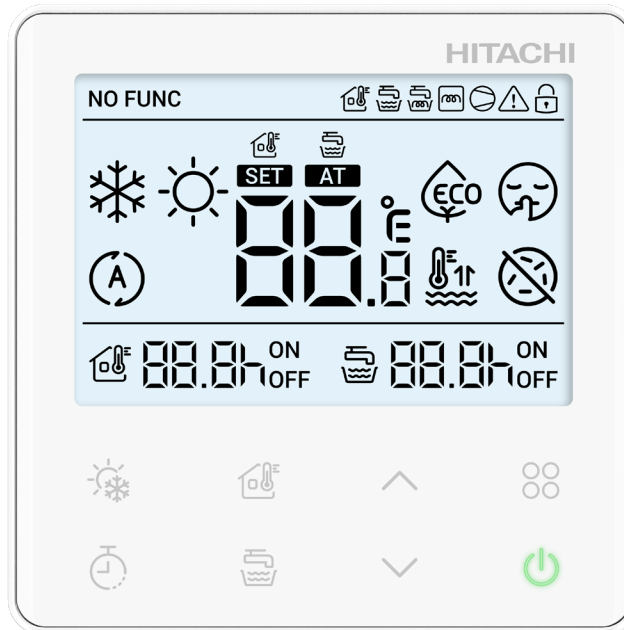


- Sleek and elegant design
- Compact, measures only 86×86mm
- Intuitive touch-button control

### General Features

- Compact body and stylish appearance
- Convenient room temp. & DHW setting
- Flat backboard, easy-to-install
- ECO/DHW boost/Timer(0.5-24h)

### One-button Switch to DHW Setting

Users can switch to the domestic hot water mode setting with one touch to realize the control of the water system, which is very convenient, no need to do the setting in other controllers.

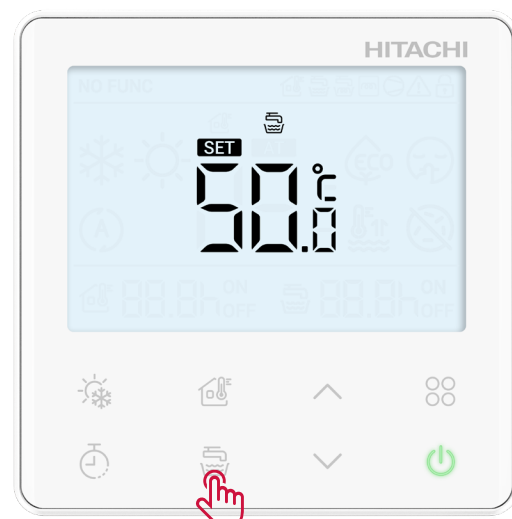


## Features & Benefits

### Easy Installation and Maintenance

#### Flexible Refrigerant Piping Design

Long piping length enables flexible design and easy installation.

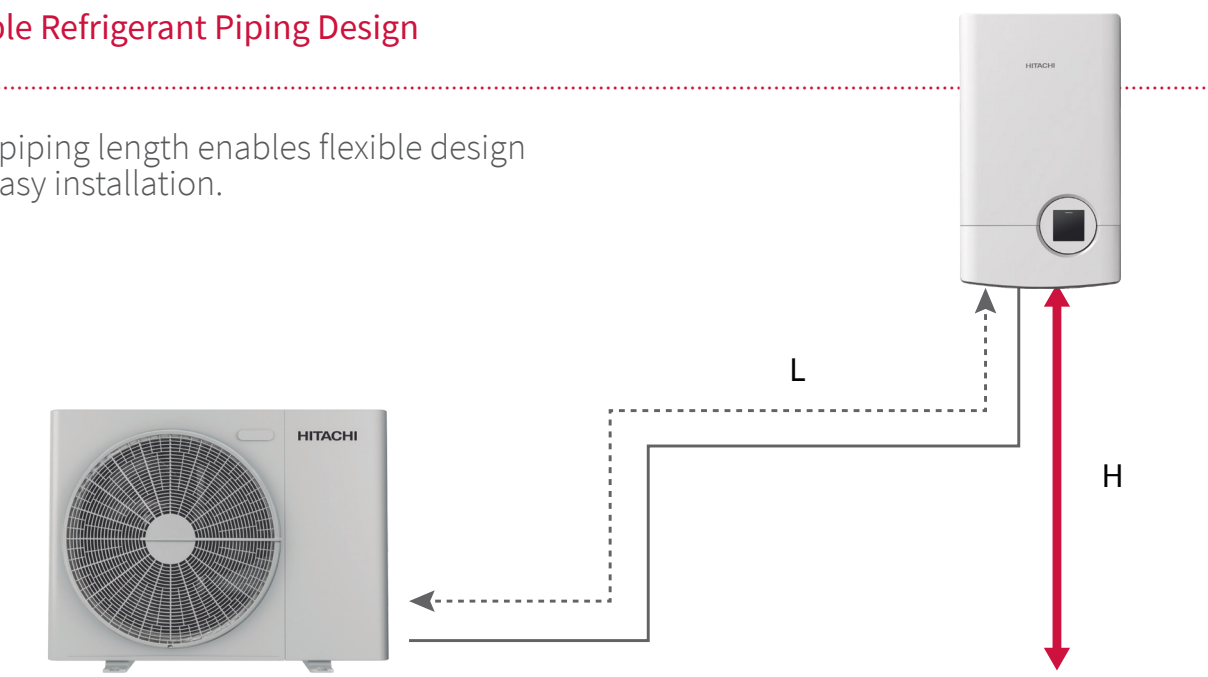

Max. piping length L: 45(50\*1)m      Max. height difference H: 20/30\*2m

\*1 When the piping length is 50m, the ambient temperature of the outdoor unit shall be  $\geq 10^{\circ}\text{C}$ , and the refrigerant charge of the unit shall be less than the max. refrigerant charge allowed by the unit.

\*2 When the outdoor unit is higher than the indoor unit, the max. height difference is 30m, otherwise is 20m.


airH<sub>2</sub>O 400 air to Water Heat Pump

15

R32

#### Convenient Maintenance for the Indoor Unit

The position of the components in indoor unit has been fully optimized, and the electrical box can be rotated  $88^{\circ}$ , which facilitates the maintenance of the parts behind the electrical box, and greatly simplifies the maintenance. Besides, there is a hook on the outer sheet metal of the electrical box, and the controller can be conveniently hung during on-site maintenance.

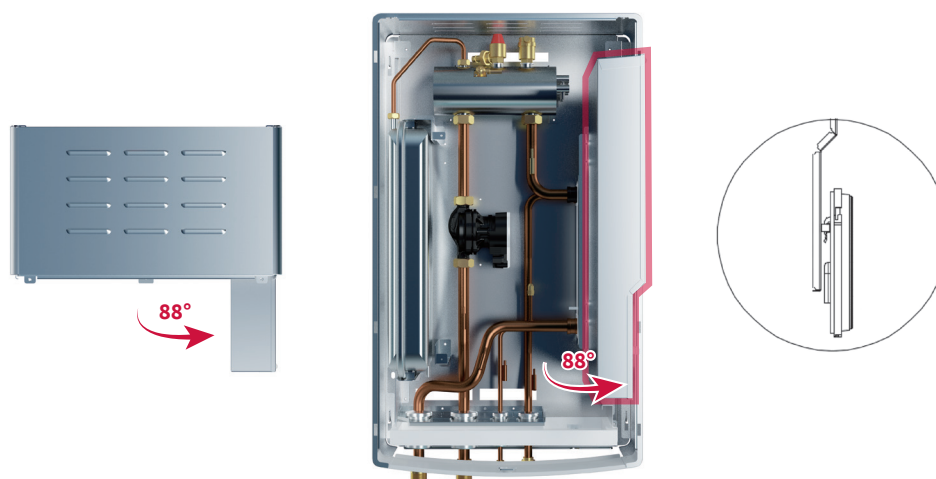

# airH<sub>2</sub>O<sub>400</sub> Checker

## Intelligent service tool, improve your service

airH2O 400 Checker is a plug and play service tool, with which service engineers can access the system and monitor operation status or data, very convenient for system communication and maintenance.



### Small and Portable Body



## Black Box Function



## Multi-language

## Different water cycles in multiple rooms control

[illegible]

Up to 130 parameters of the water system can be displayed intuitively.



Easy to use


- Compact size which allows high portability and space saving.
- Capable to slot in a 32G memory card for data collection and storage. Also the memory card and card reader are standard with airH2O 400 Checker.
- Multiple choices of power supply types. It can be powered by the standard adapter (DC 5V), computers or power banks.



Easy to access

2 ways to access the operation data

- Conventional connection type. The simplest and reliable way by just connecting the airH2O 400 Checker to your computer directly through type C USB.
- SD card storage type. airH2O 400 Checker equipped with SD card can be connected to the air conditioning system all the time without computer, so that all the operation data can be stored in the card for later analysis.

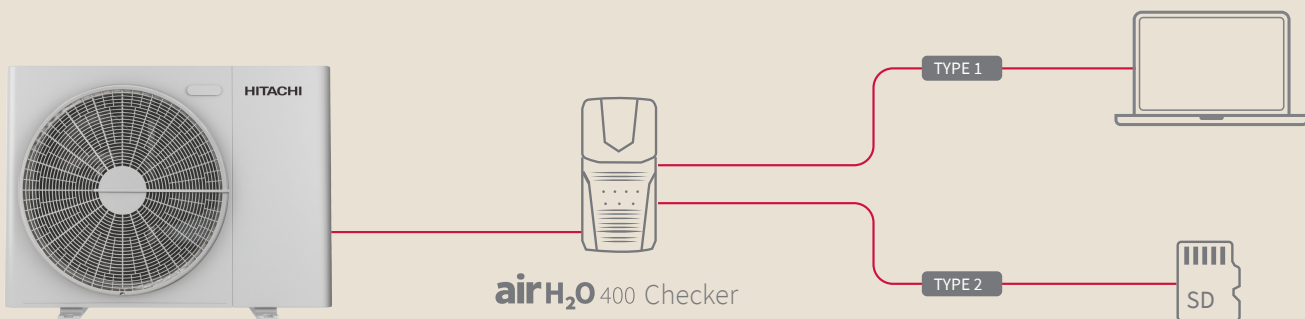

Specifications

| Model      | Size ( L×W×H ) mm | Net Weight (g) | Power Supply |
|------------|-------------------|----------------|--------------|
| HAQ-SVT-01 | 138×68×28         | 130            | 5V 500mA     |

# Accessories & Engineering Tools

## Accessories



Ambient Temperature  
Sensor

**HAQ-ATS-01**

Measure the outdoors ambient temperature in the area where the outdoor unit is installed.

Compatibility: airH2O 400 series



Water Temperature  
Sensor

**HAQ-WTS-01**

Water temperature sensor for pipeline, tank and hydraulic components

Compatibility: airH2O 400 series




Wall Mount  
Temperature Sensor

**HAQ-RTS-01**

Wall mounted room temperature sensor, with communication to heat pump system.

Compatibility: airH2O 400 series

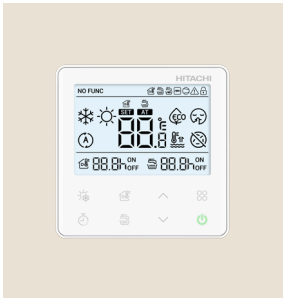

Room Thermostat

**HAQ-RTU-01**

Room thermostat for room temperature control, with communication to heat pump system.

Compatibility: airH2O 400 series



3-way Valve

**HAQ-3WV-01**

Valve to allow operation in heating/hot water

Compatibility: airH2O 400 series




Water Tank (200L, 300L)

**HAQT-200  
HAQT-300**


Domestic hot water tank

Compatibility: airH2O 400 series

unit:mm

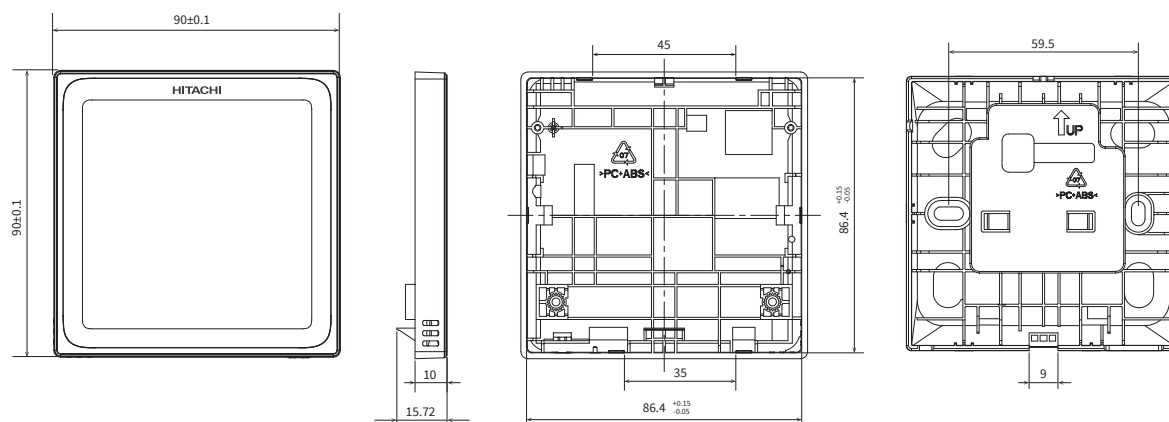


unit:mm

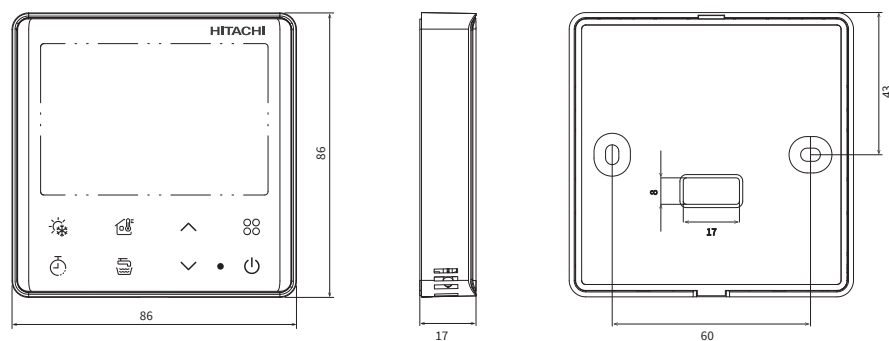

## Technical data

Split (4~8kW) Preliminary data

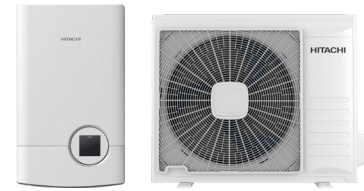

| Series                                |                                  |                           |         | Split              |                    |                   |
|---------------------------------------|----------------------------------|---------------------------|---------|--------------------|--------------------|-------------------|
| Power Supply                          | AC 1Φ 220~240V/50Hz              |                           | -       | HZKF04KSE-Q        | HZKF06KSE-Q        | HZKF08KSE-Q       |
| OAT (DB/WB)                           | IWT/OWT                          | -                         | Unit    | Heating Operation  |                    |                   |
| 7/6℃                                  | 30 / 35℃                         | Capacity (Min./Nom./Max.) | kW      | 1.85 / 4.40 / 7.00 | 1.95 / 6.00 / 8.90 | 2.10/ 8.00 / 11.0 |
|                                       |                                  | COP (Nom.)                | -       | 5.10               | 5.00               | 4.90              |
|                                       | 47 / 55℃                         | Capacity (Nom./Max.)      | kW      | 4.40 / 6.00        | 6.00/7.50          | 8.00/9.00         |
|                                       |                                  | COP (Nom.)                | -       | 3.00               | 3.05               | 2.80              |
| -7/-8℃                                | 30 / 35℃                         | Capacity (Nom./Max.)      | kW      | 4.40 / 5.00        | 5.30/5.90          | 5.80/7.30         |
|                                       |                                  | COP (Nom.)                | -       | 3.26               | 3.16               | 3.14              |
|                                       | 47 / 55℃                         | Capacity (Nom./Max.)      | kW      | 4.00 / 4.20        | 4.70/5.10          | 5.00/6.40         |
|                                       |                                  | COP (Nom.)                | -       | 1.97               | 2.04               | 1.94              |
| 35/ --℃                               | 12 / 7℃                          | Nominal Capacity          | kW      | 4.40               | 5.00               | 6.00              |
|                                       |                                  | EER                       | -       | 3.90               | 3.70               | 3.60              |
|                                       | 23 / 18℃                         | Nominal Capacity          | kW      | 5.60               | 6.00               | 7.00              |
|                                       |                                  | EER                       | -       | 5.60               | 5.60               | 5.10              |
| Water Outlet 35℃                      | SCOP                             |                           | -       | 5.00               | 4.93               | 4.92              |
|                                       | Seasonal Heating Efficiency (ηs) |                           | %       | 197                | 194                | 194               |
|                                       | Energy Rating                    |                           | -       | A+++               | A+++               | A+++              |
| Water Outlet 55℃                      | SCOP                             |                           | -       | 3.23               | 3.33               | 3.42              |
|                                       | Seasonal Heating Efficiency (ηs) |                           | %       | 126                | 130                | 134               |
|                                       | Energy Rating                    |                           | -       | A++                | A++                | A++               |
| Water Outlet 18℃                      | SEER                             |                           | -       | 8.87               | 8.73               | 8.54              |
|                                       | Seasonal Cooling Efficiency (ηs) |                           | %       | 352                | 346                | 339               |
| Water Outlet 7℃                       | SEER                             |                           | -       | 5.75               | 5.85               | 5.73              |
|                                       | Seasonal Cooling Efficiency (ηs) |                           | %       | 227                | 231                | 226               |
| Normal Mode (Heating/Cooling)         |                                  |                           | dB(A)   | 47 / 47            | 48/47              | 50/47             |
| Low Noise Mode (Heating/Cooling)      |                                  |                           | dB(A)   | 39 / 39            | 42/42              | 43/43             |
| Night Shift Mode (Heating/Cooling)    |                                  |                           | dB(A)   | 35 / 35            | 38/38              | 39/39             |
| Normal Mode (Heating/Cooling)         |                                  |                           | dB(A)   | 61 / 61            | 62/61              | 64/61             |
| Condenser Fan Quantity                |                                  |                           | -       | 1                  | 1                  | 1                 |
| Air Flow Rate                         |                                  |                           | m3/h    | 2700               | 2700               | 2700              |
| Recommended Fuse                      |                                  |                           | A       | 16                 | 16                 | 20                |
| Height×Width×Depth                    |                                  |                           | mm      | 750×900×340        |                    |                   |
| Compressor                            | Type                             |                           | -       | Rotary             |                    |                   |
| Refrigerant                           | Type                             |                           | -       | R32                |                    |                   |
|                                       | Charge Before Shipment           |                           | kg      | 0.98               | 0.98               | 1.05              |
| Piping                                | Gas Pipe                         |                           | mm(in.) | Φ12.7(1/2)         | Φ12.7(1/2)         | Φ15.88(1/5)       |
|                                       | Liquid Pipe                      |                           | mm      | Φ6.35(1/4)         | Φ6.35(1/4)         | Φ6.35(1/4)        |
| Min. Piping Length                    |                                  |                           | m       | 4                  |                    |                   |
| Max. Chargeless Piping Length         |                                  |                           | m       | 8                  |                    |                   |
| Max. Piping Length                    |                                  |                           | m       | 40                 | 40                 | 45 50*5           |
| Height Difference between ODU and IDU | ODU is Higher                    |                           | m       | 30                 | 30                 | 30                |
|                                       | IDU is Higher                    |                           | m       | 20                 | 20                 | 20                |
| Heating                               | Outdoor Ambient Temperature      |                           | ℃ (DB)  | -25~35             |                    |                   |
|                                       | Outlet Water Temperature         |                           | ℃       | 15~60              |                    |                   |
| DHW                                   | Outdoor Ambient Temperature      |                           | ℃ (DB)  | -25~40             |                    |                   |
|                                       | Tank Water Temperature           |                           | ℃       | 30~55(75*6)        |                    |                   |
| Cooling                               | Outdoor Ambient Temperature      |                           | ℃ (DB)  | 5~46               |                    |                   |
|                                       | Outlet Water Temperature         |                           | ℃       | 5~22               |                    |                   |



| Indoor Unit                     |         | HZKF04KIE-Q                     | HZKF06KIE-Q | HZKF08KIE-°Q |
|---------------------------------|---------|---------------------------------|-------------|--------------|
| -                               |         | AC 1Φ, 220~240V/50Hz            |             |              |
| IWT: 30°C / OWT: 35°C ΔT: 5°C   | m3/h    | 0.76                            | 1.03        | 1.38         |
|                                 | m3/h    | 0.50                            | 0.60        | 0.60         |
| Net Lift Pressure               | m       | 6.2                             | 4.7         | 3.2          |
| Max. Lift Pressure              | m       | 7.6                             |             |              |
| Max. Water Flow Rate            | m3/h    | 3.5                             |             |              |
| Energy Efficiency Class         | -       | A                               |             |              |
| Speed                           | -       | Inverter                        |             |              |
| Max. Power Input                | W       | 50                              |             |              |
| Water Electric Heater (3 Steps) | kW      | 1/2/3                           |             |              |
| Material                        | -       | Brass                           |             |              |
| Diameter                        | in.     | 1"                              |             |              |
| Mesh Filter                     | -       | 50                              |             |              |
| Type Filter                     | -       | Self-cleaning (with back flush) |             |              |
| Safety Valve                    | bar     | 3                               |             |              |
| Shut-off Valve                  | -       | 2 pcs Supplied                  |             |              |
| Sound Pressure                  | dB(A)   | 28                              |             |              |
| Sound Power                     | dB(A)   | 42                              |             |              |
| Recommended Fuse                | A       | 20(40*7)                        |             |              |
| Height×Width×Depth              | mm      | 890×520×320                     |             |              |
| Connection Type                 | -       | Flare Nut Connection            |             |              |
| Gas Pipe                        | mm(in.) | Φ12.7(1/2)                      |             | Φ15.88 5/8   |
| Liquid Pipe                     | mm(in.) | Φ6.35(1/4)                      |             | Φ6.35(1/4)   |
| Connection type                 | -       | Screwed Connection              |             |              |
| Shutdown valves                 | in.     | G1"- G1"(female)                |             |              |
| Inlet pipe diameter             | in.     | G1"(male)                       |             |              |
| Outlet pipe diameter            | in.     | G1"(male)                       |             |              |

#### NOTES:

1: Heating/Cooling nominal performances at full load conditions according to EN 14511. Pipe length 7.5 m; height difference ODU/IDU 0 m; heating performance are integrated (included defrost cycles).

2: According to EN14825. Climate Zone AVERAGE. Energy efficiency scale from A +++ to D.

3: The data is TBC.

4: The noise values are measured in the anechoic chamber without reflected echo, in accordance with the standard EN12102.

5: The ambient temperature of the outdoor unit shall be ≥10°C, and the refrigerant charge of the unit shall be less than the maximum refrigerant charge allowed by the unit.

6: When there is an DHW electric heater mounted in the DHW tank ,the setting temperature can reach 75°C.

7: The value is the data when electric heater is working.

OAT: Outdoor ambient temperature; IWT: Inlet water temperature; OWT: Outlet water temperature.

# airH<sub>2</sub>O 400

Split (10~16kW) Preliminary data



| Series                               |                                             |                                               |                           |                    | Split                      |                            |                            |                            |
|--------------------------------------|---------------------------------------------|-----------------------------------------------|---------------------------|--------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Outdoor Unit                         | Power Suply                                 | AC 3Φ, 380~415V/50Hz<br>AC 1Φ, 220~240V/50Hz, |                           | -<br>-             | HZKF10KSE-Q<br>HZKF10KSO-Q | HZKF12KSE-Q<br>HZKF12KSO-Q | HZKF14KSE-Q<br>HZKF14KSO-Q | HZKF16KSE-Q<br>HZKF16KSO-Q |
| Heating<br>Operation <sup>1</sup>    | OAT (DB/WB)                                 | IWT/OWT                                       | -                         | Unit               | Heating Operation          |                            |                            |                            |
|                                      | 7/6℃                                        | 30 / 35℃                                      | Capacity (Min./Nom./Max.) | kW                 | 10.00/12.50                | 12.00/14.50                | 14.00/16.00                | 16.00/18.00                |
|                                      |                                             |                                               | COP (Nom.)                | -                  | 5.10                       | 4.95                       | 4.80                       | 4.60                       |
|                                      |                                             | 47 / 55℃                                      | Capacity (Nom./Max.)      | kW                 | 10.00/11.00                | 12.00/13.00                | 14.00/15.00                | 15.50/17.00                |
|                                      |                                             |                                               | COP (Nom.)                | -                  | 3.10                       | 3.05                       |                            | 2.95                       |
|                                      | -7/-8℃                                      | 30 / 35℃                                      | Capacity (Nom./Max.)      | kW                 | 9.50                       | 10.80                      | 13.50                      | 14.00                      |
|                                      |                                             |                                               | COP (Nom.)                | -                  | 3.10                       | 3.00                       | 2.85                       | 2.80                       |
|                                      |                                             | 47 / 55℃                                      | Capacity (Nom./Max.)      | kW                 | 8.0                        | 8.5                        | 10.0                       | 11.0                       |
|                                      |                                             |                                               | COP (Nom.)                | -                  | 2.15                       | 2.10                       | 2.05                       | 2.00                       |
| Cooling<br>Operation <sup>1</sup>    | 35/ -℃                                      | 12 / 7℃                                       | Nominal Capacity          | kW                 | 8.5                        | 10.0                       | 11.0                       | 13.0                       |
|                                      |                                             |                                               | EER                       | -                  | 3.00                       | 2.85                       |                            | 2.70                       |
|                                      |                                             | 23 / 18℃                                      | Nominal Capacity          | kW                 | 9.0                        | 11.0                       | 14.0                       | 15.5                       |
|                                      |                                             |                                               | EER                       | -                  | 4.5                        | 4.1                        | 4.2                        | 3.9                        |
| Seasonal<br>Performance <sup>2</sup> | Water Outlet 35℃                            | SCOP                                          |                           | -                  | 4.8                        | 4.7                        | 4.6                        | 4.5                        |
|                                      |                                             | Seasonal Heating Efficiency (ηs)              |                           | %                  | 188                        | 185                        | 180                        | 177                        |
|                                      |                                             | Energy Rating                                 |                           | -                  | A+++                       |                            |                            |                            |
|                                      | Water Outlet 55℃                            | SCOP                                          |                           | -                  | 3.4                        | 3.35                       | 3.3                        |                            |
|                                      |                                             | Seasonal Heating Efficiency (ηs)              |                           | %                  | 133                        | 130                        | 128                        | 127                        |
|                                      |                                             | Energy Rating                                 |                           | -                  | A++                        |                            |                            |                            |
| Sound Pressure <sup>3</sup>          | Normal Mode                                 |                                               |                           | dB(A)              | 51                         |                            | 54                         |                            |
|                                      | Low Noise Mode                              |                                               |                           | dB(A)              | 42                         | 45                         | 46                         | 47                         |
|                                      | Night Shift Mode                            |                                               |                           | dB(A)              | 41                         |                            | 43                         |                            |
| Sound Power <sup>4</sup>             | Normal Mode                                 |                                               |                           | dB(A)              | 63                         | 64                         | 66                         | 67                         |
| Fan                                  | Condenser Fan Quantity                      |                                               |                           | -                  | 1                          |                            |                            |                            |
|                                      | Air Flow Rate                               |                                               |                           | m3/h               | 5200                       |                            | 4700                       |                            |
| Outer Dimensions                     |                                             |                                               |                           | Height×Width×Depth | mm                         | 840×1100×390               |                            |                            |
| Refrigerant<br>System                | Compressor                                  | Type                                          |                           | -                  | Rotary                     |                            |                            |                            |
|                                      | Refrigerant                                 | Type                                          |                           | -                  | R32                        |                            |                            |                            |
|                                      |                                             | Charge Before Shipment                        |                           | kg                 | 1.8                        |                            | 2.7                        |                            |
|                                      | Piping                                      | Gas Pipe                                      |                           | mm(in.)            | 15.88 (5/8)                |                            |                            |                            |
|                                      |                                             | Liquid Pipe                                   |                           | mm                 | 9.53 (3/8)                 |                            |                            |                            |
|                                      | Min. Piping Length                          |                                               |                           | m                  | 5                          |                            |                            |                            |
|                                      | Max. Chargeless Piping Length               |                                               |                           | m                  | 15                         |                            |                            |                            |
|                                      | Max. Piping Length                          |                                               |                           | m                  | 50                         |                            |                            |                            |
|                                      | Height Difference<br>between ODU<br>and IDU | ODU is Higher                                 |                           | m                  | 30                         |                            |                            |                            |
|                                      |                                             | IDU is Higher                                 |                           | m                  | 20                         |                            |                            |                            |
| Operation<br>Range                   | Heating                                     | Outdoor Ambient Temperature                   |                           | ℃ (DB)             | -25~35                     |                            |                            |                            |
|                                      |                                             | Outlet Water Temperature                      |                           | ℃                  | 20~65                      |                            |                            |                            |
|                                      | DHW                                         | Outdoor Ambient Temperature                   |                           | ℃ (DB)             | -25~43                     |                            |                            |                            |
|                                      |                                             | Tank Water Temperature                        |                           | ℃                  | 30~60(75) <sup>4</sup>     |                            |                            |                            |
|                                      | Cooling                                     | Outdoor Ambient Temperature                   |                           | ℃ (DB)             | 5~46                       |                            |                            |                            |
|                                      |                                             | Outlet Water Temperature                      |                           | ℃                  | 5~22                       |                            |                            |                            |

| Indoor Unit                         | Power Supply         | AC 1Φ, 220~240V/50Hz,<br>AC 3Φ, 380-415V/50Hz | -<br>-  | HZKF10KIE-Q<br>HZKF10KIO-Q | HZKF12KIE-Q<br>HZKF12KIO-Q | HZKF14KIE-Q<br>HZKF14KIO-Q | HZKF16KIE-Q<br>HZKF16KIO-Q |
|-------------------------------------|----------------------|-----------------------------------------------|---------|----------------------------|----------------------------|----------------------------|----------------------------|
| Water Flow Rate                     |                      | IWT: 30°C / OWT: 35°C ΔT: 5°C                 | m3/h    | 1.72                       | 2.06                       | 2.40                       | 2.76                       |
| Min. Water Flow Rate                |                      |                                               | m3/h    | 0.8                        | 0.9                        | 1.1                        | 1.2                        |
| DC Water Pump                       | Max. Lift Pressure   |                                               | m       | 12                         |                            |                            |                            |
|                                     | Max. Water Flow Rate |                                               | m3/h    | 5.6                        |                            |                            |                            |
|                                     | Speed                |                                               | -       | Inverter                   |                            |                            |                            |
|                                     | Max. Power Input     |                                               | W       | 180                        |                            |                            |                            |
| Water Electric Heater (3 Steps)     |                      |                                               | kW      | 2/4/6                      |                            |                            |                            |
| Shut-off Valve with Filter          | Diameter             |                                               | in.     | 1"                         |                            |                            |                            |
|                                     | Mesh Filter          |                                               | -       | 50                         |                            |                            |                            |
|                                     | Safety Valve         |                                               | bar     | 3                          |                            |                            |                            |
| Shut-off Valve                      |                      |                                               | -       | 2 pcs Supplied             |                            |                            |                            |
| Sound Pressure                      |                      |                                               | dB(A)   | 36                         |                            |                            |                            |
| Sound Power                         |                      |                                               | dB(A)   | 42                         |                            |                            |                            |
| Outer Dimensions (with connections) | Height×Width×Depth   |                                               | mm      | 890×520×320                |                            |                            |                            |
| Refrigerating Installation          | Connection Type      |                                               | -       | Flare Nut                  |                            |                            |                            |
|                                     | Gas Pipe             |                                               | mm(in.) | 15.88 (5/8)                |                            |                            |                            |
|                                     | Liquid Pipe          |                                               | mm(in.) | 9.53 (3/8)                 |                            |                            |                            |
| Water Installation                  | Connection type      |                                               | -       | Screwed Connection         |                            |                            |                            |
|                                     | Shutdown valves      |                                               | in.     | G1"- G1"(female)           |                            |                            |                            |
|                                     | Inlet pipe diameter  |                                               | in.     | G1"(male)                  |                            |                            |                            |
|                                     | Outlet pipe diameter |                                               | in.     | G1"(male)                  |                            |                            |                            |

#### NOTES:

1: Heating/Cooling nominal performances at full load conditions according to EN 14511. Pipe length 7.5 m; height difference ODU/IDU 0 m; heating performance are integrated (included defrost cycles).

2: According to EN14825. Climate Zone AVERAGE. Energy efficiency scale from A+++ to D.


3: The data is TBC.

4: The noise values are measured in the anechoic chamber without reflected echo, in accordance with the standard EN12102.

OAT: Outdoor ambient temperature; IWT: Inlet water temperature; OWT: Outlet water temperature.

# airH<sub>2</sub>O 400

Mono (4~8kW) Preliminary data



| Series                            |                        |                                  |                           |         | Monobloc               |                   |
|-----------------------------------|------------------------|----------------------------------|---------------------------|---------|------------------------|-------------------|
| Model                             |                        | HP                               |                           |         | 2.0                    | 3.0               |
|                                   |                        | Outdoor Unit                     |                           |         | HZKF04KME-Q            | HZKF08KME-Q       |
| Heating Operation <sup>1</sup>    | Power Supply           |                                  |                           |         | AC 1Φ, 220~240V/50Hz   |                   |
|                                   | OAT (DB/WB)            | IWT/OWT                          | -                         | Unit    | Heating Operation      |                   |
|                                   | 7/6°C                  | 30 / 35°C                        | Capacity (Min./Nom./Max.) | kW      | 1.85 / 4.40 / 7.00     | 2.10/ 8.00 / 11.0 |
|                                   |                        |                                  | COP (Nom.)                | -       | 5.10                   | 4.90              |
|                                   |                        | 47 / 55°C                        | Capacity (Nom./Max.)      | kW      | 4.40/6.00              | 8.00/9.00         |
|                                   |                        |                                  | COP (Nom.)                | -       | 3.00                   | 2.80              |
|                                   | -7/-8°C                | 30 / 35°C                        | Capacity (Nom./Max.)      | kW      | 4.40/5.00              | 5.80/7.30         |
|                                   |                        |                                  | COP (Nom.)                | -       | 3.26                   | 3.14              |
|                                   |                        | 47 / 55°C                        | Capacity (Nom./Max.)      | kW      | 4.00/4.20              | 5.00/6.40         |
|                                   |                        |                                  | COP (Nom.)                | -       | 1.97                   | 1.94              |
| Cooling Operation <sup>1</sup>    | 35/ --°C               | 12 / 7°C                         | Nominal Capacity          | kW      | 4.40                   | 6.50              |
|                                   |                        |                                  | EER                       | -       | 4.00                   | 3.35              |
|                                   |                        | 23 / 18°C                        | Nominal Capacity          | kW      | 5.60                   | 7.00              |
|                                   |                        |                                  | EER                       | -       | 5.60                   | 5.10              |
| Seasonal Performance <sup>2</sup> | Water Outlet 35°C      | SCOP                             |                           | -       | 5.17                   | 5.00              |
|                                   |                        | Seasonal Heating Efficiency (ηs) |                           | %       | 204                    | 197               |
|                                   |                        | Energy Rating                    |                           | -       | A+++                   |                   |
|                                   | Water Outlet 55°C      | SCOP                             |                           | -       | 3.47                   | 3.50              |
|                                   |                        | Seasonal Heating Efficiency (ηs) |                           | %       | 136                    | 137               |
|                                   |                        | Energy Rating                    |                           | -       | A++                    |                   |
|                                   | Water Outlet 18°C      | SEER                             |                           | -       | 10.06                  | 7.38              |
|                                   |                        | Seasonal Cooling Efficiency (ηs) |                           | %       | 399                    | 292               |
|                                   | Water Outlet 7°C       | SEER                             |                           | -       | 5.75                   | 5.83              |
|                                   |                        | Seasonal Cooling Efficiency (ηs) |                           | %       | 227                    | 230               |
| Sound Pressure <sup>3</sup>       | Normal Mode            |                                  |                           | dB(A)   | 47/47                  | 50/47             |
|                                   | Low Noise Mode         |                                  |                           | dB(A)   | 40/40                  | 43/43             |
|                                   | Night Shift Mode       |                                  |                           | dB(A)   | 36/36                  | 39/39             |
| Sound Power <sup>4</sup>          | Normal Mode            |                                  |                           | dB(A)   | 61/61                  | 64/61             |
| Fan                               | Condenser Fan Quantity |                                  |                           | -       | 1                      |                   |
|                                   | Air Flow Rate          |                                  |                           | m3/h    | 2700                   |                   |
| Recommended Fuse                  |                        |                                  |                           | A       | 16                     | 20                |
| Outer Dimensions                  |                        | Height×Width×Depth               |                           | mm      | 815×1270×340           |                   |
| Refrigerant System                | Compressor             | Type                             |                           | -       | Rotary                 |                   |
|                                   | Refrigerant            | Type                             |                           | -       | R32                    |                   |
|                                   |                        | Charge Before Shipment           |                           | kg      | 1.17                   | 1.21              |
| Operation Range                   | Heating                | Outdoor Ambient Temperature      |                           | °C (DB) | -25~35                 |                   |
|                                   |                        | Outlet Water Temperature         |                           | °C      | 15~60                  |                   |
|                                   | DHW                    | Outdoor Ambient Temperature      |                           | °C (DB) | -25~40                 |                   |
|                                   |                        | Tank Water Temperature           |                           | °C      | 30~55(75) <sup>5</sup> |                   |
|                                   | Cooling                | Outdoor Ambient Temperature      |                           | °C (DB) | 5~46                   |                   |
|                                   |                        | Outlet Water Temperature         |                           | °C      | 5~22                   |                   |



| Indoor Unit                     |                         |      | Hydraulic Components          |                                 |
|---------------------------------|-------------------------|------|-------------------------------|---------------------------------|
| Water Flow Rate                 |                         |      | IWT: 30°C / OWT: 35°C ΔT: 5°C |                                 |
|                                 |                         | m3/h | 0.77                          | 1.38                            |
| Min. Water Flow Rate            |                         | m3/h | 0.50                          | 0.60                            |
| DC Water Pump                   | Net Lift Pressure       |      | m                             | 8.40                            |
|                                 | Max. Lift Pressure      |      | m                             | 9                               |
|                                 | Max. Water Flow Rate    |      | m3/h                          | 4.5                             |
|                                 | Energy Efficiency Class |      | -                             | A                               |
|                                 | Speed                   |      | -                             | Inverter                        |
|                                 | Max. Power Input        |      | W                             | 87                              |
| Water Electric Heater (3 Steps) |                         | kW   | External (optional)           |                                 |
| Shut-off Valve with Filter      | Material                |      | -                             | Brass                           |
|                                 | Diameter                |      | in.                           | 1"                              |
|                                 | Mesh Filter             |      | -                             | 50                              |
|                                 | Type Filter             |      | -                             | Self-cleaning (with back flush) |
| Safety Valve                    |                         | bar  | 3                             |                                 |
| Shut-off Valve                  |                         | -    | 2 pcs supplied                |                                 |
| Water Installation              | Connection type         |      | -                             | Screwed Connection              |
|                                 | Shutdown valves         |      | in.                           | G1" - G1"(female)               |
|                                 | Inlet pipe diameter     |      | in.                           | G1"(female)                     |
|                                 | Outlet pipe diameter    |      | in.                           | G1"(female)                     |

**NOTES:**  
1: Heating/Cooling nominal performances at full load conditions according to EN 14511. Pipe length 7.5 m; height difference ODU/IDU 0 m; heating performance are integrated (included defrost cycles).  
2: According to EN14825. Climate Zone AVERAGE. Energy efficiency scale from A +++ to D.  
3: The data is TBC.  
4: The noise values are measured in the anechoic chamber without reflected echo, in accordance with the standard EN12102.  
5: When there is an DHW electric heater mounted in the DHW tank ,the setting temperature can reach 75°C.  
OAT: Outdoor ambient temperature; IWT: Inlet water temperature; OWT: Outlet water temperature.

100







---

## Johnson Controls Hitachi Air Conditioning Europe S.A.S.

### ADDRESS

Parc Aktiland II – 2,  
Rue de Lombardie – 69800 SAINT PRIEST,  
FRANCE  
[www.hitachiaircon.com](http://www.hitachiaircon.com)

The specifications of this catalog may change without prior notice to allow Hitachi Cooling & Heating to incorporate the latest innovations for its customers. The information contained in this catalog is merely informative. Hitachi Cooling & Heating declines any responsibility in the broadest sense, for damage, direct or indirect, arising from the use and / or interpretation of the recommendations in this catalog.

Find the products Hitachi Cooling & Heating  
with the best service and conditions at your  
Hitachi Distributor